## ▼ PRODUCT OVERVIEW

**SQUARE ROSE**



**SATIN NICKEL**
Finish 15

**MATTE BLACK**
Finish 19

**POLISHED CHROME**
Finish 26

**ROUND ROSE**



**SATIN NICKEL**
Finish 15

**MATTE BLACK**
Finish 19

**POLISHED CHROME**
Finish 26

Fig. 1: PaceLine Leverset on square rose (top) and round rose (bottom), shown in all three available finishes

**ANSI GRADE 3** | **MEETS ADA** | **REVERSIBLE**

A modern interior lever with an ergonomic shape that sits comfortably in the hand, on your choice of a square or round rose. Available in passage, privacy, keyed entry and dummy functions.

- ✓ Ergonomic lever shape
- ✓ Universal 6-in-1 latches offer a guaranteed fit
- ✓ Fully reversible for left- or right-hand doors

### AT A GLANCE

| | |
|---|---|
| **Style** | Ergonomic lever, square or round rose |
| **Functions** | Passage, privacy, keyed entry, dummy |
| **Grade** | ANSI Grade 3 |
| **Accessibility** | Meets ADA standards |
| **Door Thickness** | 1-3/8" to 1-3/4" (35 to 45 mm) |
| **Backset** | Adjustable, 2-3/8" to 2-3/4" (60 to 70 mm) |
| **Bore Hole** | 2-1/8" (54 mm) |
| **Rose** | 2-9/16" (65 mm), square or round |
| **Warranty** | 1 Year in-house Rusco warranty. Thereafter, refer to Taymor for continued warranty |

## 1 FUNCTIONS

- **Passage:** both levers always free; for hallways and closets
- **Privacy:** push-button lock on the inside with auto-release; for bedrooms and bathrooms
- **Keyed Entry:** keyed outside lever with turn-button auto-release inside
- **Dummy:** non-turning lever; for closets and inactive doors

## 2 LATCH & STRIKE

- Universal 6-in-1 latch: drive-in, square mortise and radius corner, with adjustable backset of 2-3/8" (60 mm) to 2-3/4" (70 mm)
- 1" (25 mm) latch faceplate
- Full lip radius corner strike with adjustable tab, 1-3/4" x 2-1/4" (45 x 57 mm), standard

## ▼ DIMENSIONS

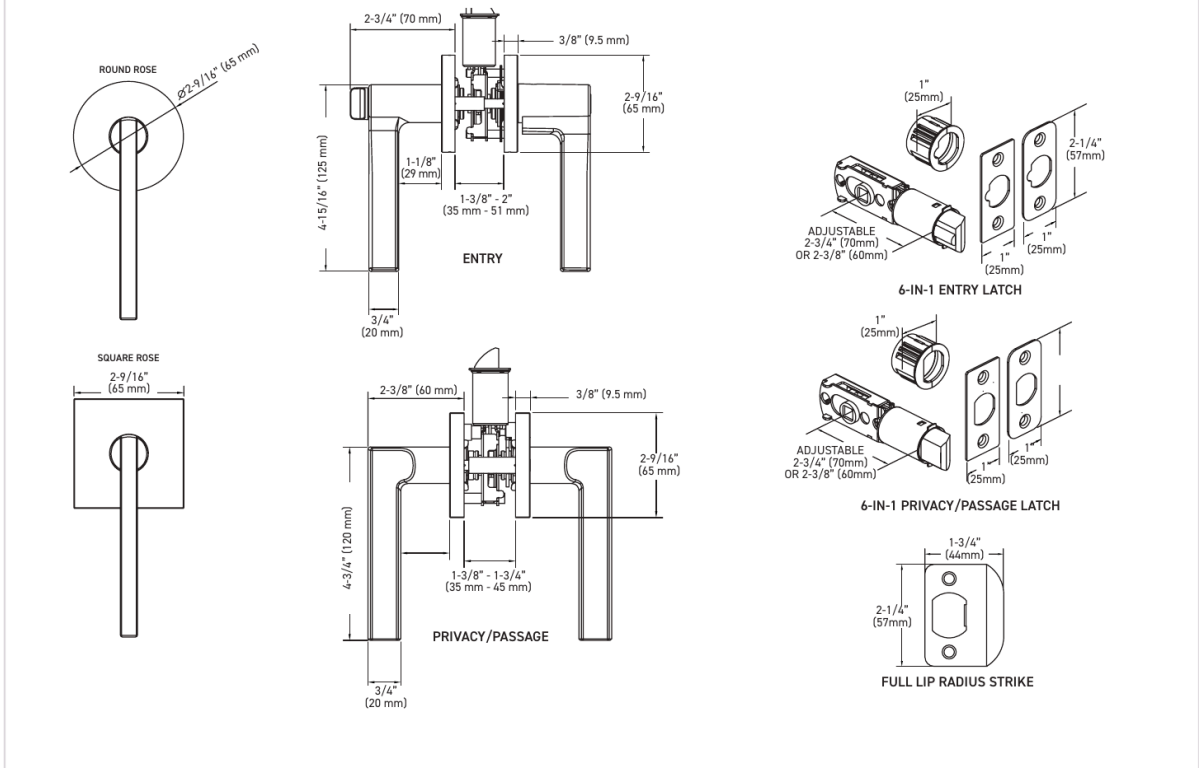



Fig. 2: Square and round rose, entry and privacy/passage side views, latch and strike dimensions

Measurements are for reference only and are subject to a 3% variance. Confirm door preparation against the hardware supplied before boring.

## 3 DOOR PREPARATION & INSTALLATION

- Fits doors 1-3/8" to 1-3/4" (35 to 45 mm) thick
- Standard bore hole: 2-1/8" (54 mm)
- Screw locations top and bottom for easier installation
- Easy-access exposed dual screws (one side)

## 4 FINISHES

- Satin Nickel (15)
- Matte Black (19)
- Polished Chrome (26)

## 5 KEYING & RATINGS

- WR5 keyway on keyed entry function; full keying services available
- Non-fire rated

## 6 WARRANTY

- 1 Year in-house Rusco warranty. Thereafter, refer to Taymor for continued warranty